




カットコアトランス・リアクトル外形図

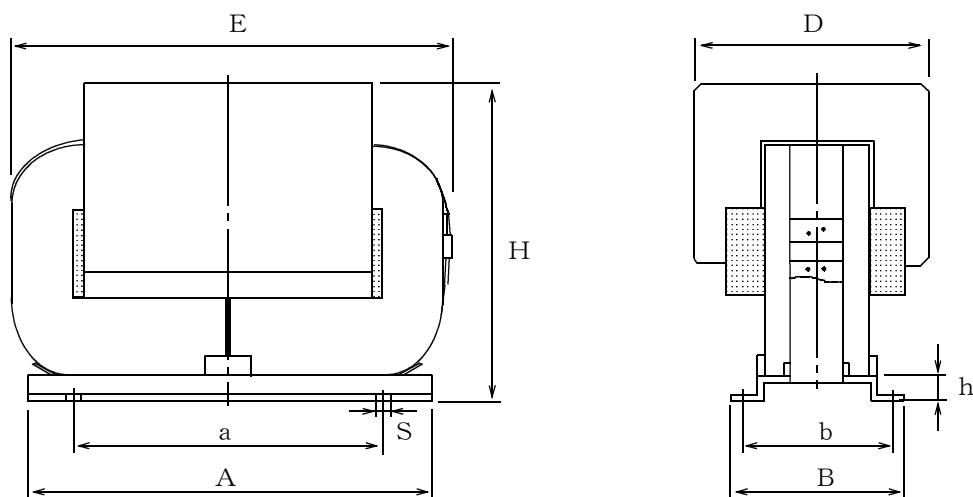

寸法 型名	A ±0.5	a ±0.5	B ±0.5	b -1.0	S ±0.2	D max	E max	H max	h ±0.5	容量 VA	重量 kg
PYL6.3	48	33	40	32	4	37	65	50	5	6.3	0.35
PYL8	48	33	40	32	4	40	65	55	5	8	0.40
PYL10	58	40	40	32	4	40	75	55	5	10	0.45
PYL16A	60	40	45	35	4	45	75	55	5	16	0.60
PYL16B	68	50	45	35	4	45	85	55	5	16	0.65
PYL20	68	50	50	40	4	50	85	55	5	20	0.80
PYL25	77	55	45	35	4	48	95	63	5	25	0.90
PYL32	77	55	50	40	4	55	95	63	5	32	1.05
PYL40	77	55	60	45	4	60	95	68	9	40	1.20
PYL50	96	70	45	35	5	55	115	83	9	50	1.35
PYL63	96	70	50	40	5	60	115	83	9	63	1.60
PYL80	96	70	70	50	4.5	68	115	83	9	80	2.20
PYL100	96	70	70	50	4.5	75	115	83	9	100	2.50
PYL125	121	80	62	47	5	65	135	100	9	125	2.70
PYL160	121	80	68	52	5	70	135	100	9	160	3.05
PYL200	121	80	78	62	5	80	135	100	9	200	3.80
PYL250	128	90	90	72	5	90	145	100	9	250	4.80
PYL320	129	85	80	65	5	90	145	125	9	320	5.00
PYL400	129	85	96	82	6	105	145	125	9	400	6.50
PYL500	135	85	85	65	6	100	150	140	9	500	6.60
PYL630	135	85	100	82	6	115	150	140	9	630	8.40

PYLシリーズ外形図ver1.0

承認	作成
 Pony 12.03.02 長井(真)	 Pony 12.03.02 高橋